



TOP 1 OIL PRODUCTS COMPANY

PRODUCT DATA SHEET

April 2022

TOP 1 LIFETIME ATF DM-III

DESCRIPTIONS

TOP 1 LIFETIME ATF DM III is designed for use in most automatic transmissions where D-III or MERCON fluids are recommended. **TOP 1 LIFETIME ATF DM** is a high performance, multi-purpose transmission fluid which provides smooth consistent all weather shifting and all around lubrication protection of transmission components.

TOP 1 LIFETIME ATF DM-III dirancang untuk transmisi matik yang menggunakan standarisasi D-III atau MERCON. **TOP 1 LIFETIME ATF DM-III** merupakan pelumas transmisi matik yang membuat perpindahan gigi lebih halus pada berbagai kondisi lingkungan dan memberi perlindungan menyeluruh pada komponen transmisi.

FEATURES AND ADVANTAGES

- Recommended for automatic transmissions in passenger cars, light truck, and heavy duty vehicles. Always refer to owner's manual for correct choice of ATF for your vehicle.
- Also recommended for Power Steering or Mobile Hydraulic Systems.
- Direkomendasikan untuk transmisi matik baik kendaraan keluarga maupun kendaraan berat. Selalu gunakan buku manual masing-masing kendaraan sebagai acuan untuk menentukan ATF yang sesuai.
- Dapat digunakan juga sebagai pelumas power steering atau sistem hidrolik kendaraan

APPLICATION

TOP 1 LIFETIME ATF DM III is suitable for use in the following OEM specification:

TOP 1 LIFETIME ATF DM III memenuhi standarisasi pabrikan otomotif, dengan spesifikasi:


Allison C-4, DEX III-G/III-H, Ford M, TASA, Volvo 97325/97335/97340, ZF TE-ML 05L, ZF TE-ML 09L, ZF TE-ML 21L

TYPICAL SPECIFICATIONS

PARAMETER	UNIT	LIFETIME ATF DM III
Appearance		Red
Density @15 C	kg/m3	843.9
Kin Visc at 40 C	cSt	35.28
Kin Visc at 100 C	cSt	7.1
Visc Index		195
Flash point (COC)	C	192
TAN	mgKOH/g	1.84
Pour point	C	-47

*These characteristics are typical. Variations may occur in future production

FLATE PLATE FRICTION (150 Hrs)

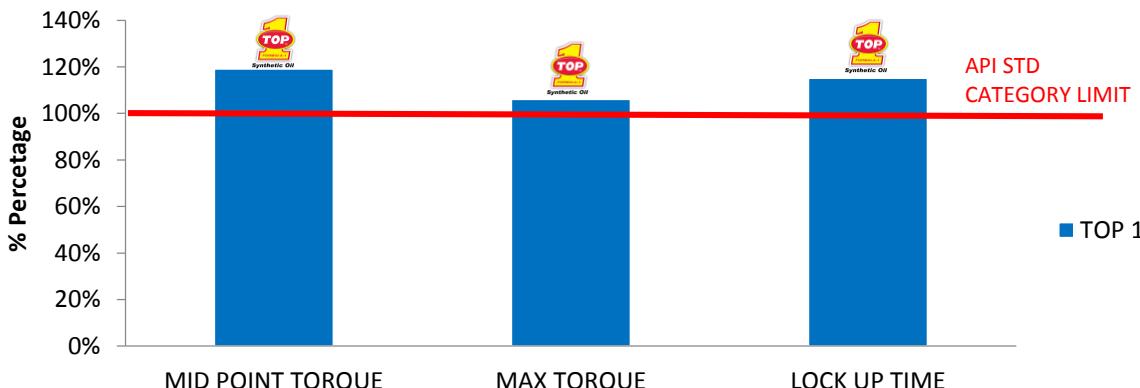

*Based on engine oil additive test result